

K24 & K25 - One-Piece Ballast Pan Strip Kit with No Brackets

2 Series



Product Overview

The K24 and K25 (2 Series) retrofit kits make retrofitting existing strip channels a snap. Most of the prep can be off ladder then wired to the power and screwed into place through pre-drilled holes. The pan can be configured to accommodate various ballasts. Kit contains ballast pan, fasteners and sockets and is available in T8 or T5.

Kit Includes

- 1 or 2 Ballast Pans*
- 2 to 8 Sockets*
- 4 to 6 Tek Screws*
- 2 to 4 Ballast Bolts*
- 2 to 4 Pal Nuts*

*depends on if a 4 ft. to 8 ft. lamp configuration is being used

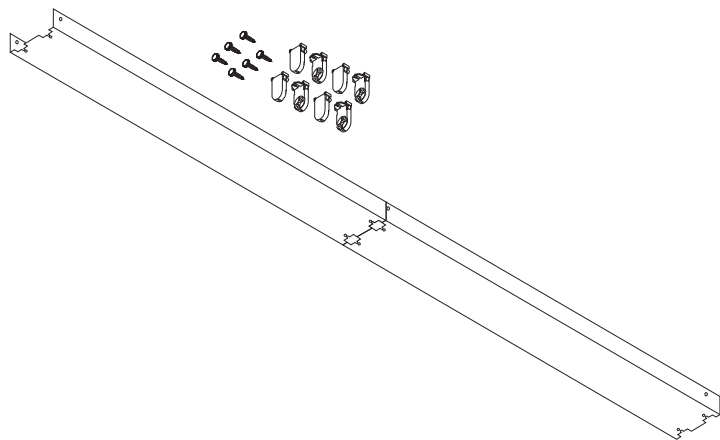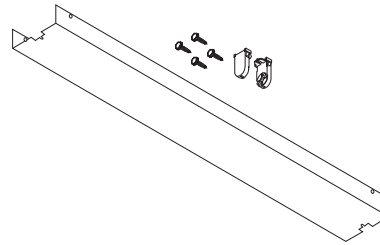

K24 & K25 - Photometrics

reflect-a-light™

| Coefficients of Utilization-Zonal Cavity Method Effective Floor Cavity Reflectance 0.20 | | | | | | | | | | | | |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| | 80% | | | | 70% | | | | 50% | | | |
| RW | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | |
| 0 | 105 | 105 | 105 | 105 | 102 | 102 | 102 | 102 | 97 | 97 | 97 | |
| 1 | 97 | 93 | 89 | 88 | 94 | 91 | 87 | 84 | 86 | 84 | 81 | |
| 2 | 89 | 82 | 76 | 72 | 86 | 80 | 75 | 71 | 76 | 72 | 68 | |
| 3 | 82 | 73 | 66 | 62 | 79 | 71 | 65 | 60 | 68 | 63 | 59 | |
| NOT AVAILABLE | | | | | | | | | | | | |
| 5 | 69 | 58 | 50 | 45 | 67 | 57 | 50 | 44 | 55 | 48 | 44 | |
| 6 | 64 | 52 | 45 | 40 | 62 | 51 | 44 | 39 | 49 | 43 | 38 | |
| 7 | 59 | 47 | 40 | 35 | 57 | 46 | 39 | 34 | 45 | 38 | 34 | |
| 8 | 54 | 43 | 35 | 30 | 53 | 42 | 35 | 30 | 40 | 34 | 29 | |
| 9 | 50 | 38 | 31 | 26 | 49 | 38 | 31 | 26 | 36 | 30 | 26 | |
| 10 | 47 | 35 | 28 | 23 | 45 | 34 | 28 | 24 | 33 | 27 | 23 | |

Catalog Number:
K24/WS/4-2B

Lamps:
Two F32T8

Ballast:
Electronic 2-F32IS

| Coefficients of Utilization-Zonal Cavity Method Effective Floor Cavity Reflectance 0.20 | | | | | | | | | | | | |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| | 80% | | | | 70% | | | | 50% | | | |
| RW | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | |
| 0 | 105 | 105 | 105 | 105 | 102 | 102 | 102 | 102 | 97 | 97 | 97 | |
| 1 | 97 | 93 | 89 | 88 | 94 | 91 | 87 | 84 | 86 | 84 | 81 | |
| 2 | 89 | 82 | 76 | 72 | 86 | 80 | 75 | 71 | 76 | 72 | 68 | |
| 3 | 82 | 73 | 66 | 62 | 79 | 71 | 65 | 60 | 68 | 63 | 59 | |
| NOT AVAILABLE | | | | | | | | | | | | |
| 5 | 69 | 58 | 50 | 45 | 67 | 57 | 50 | 44 | 55 | 48 | 44 | |
| 6 | 64 | 52 | 45 | 40 | 62 | 51 | 44 | 39 | 49 | 43 | 38 | |
| 7 | 59 | 47 | 40 | 35 | 57 | 46 | 39 | 34 | 45 | 38 | 34 | |
| 8 | 54 | 43 | 35 | 30 | 53 | 42 | 35 | 30 | 40 | 34 | 29 | |
| 9 | 50 | 38 | 31 | 26 | 49 | 38 | 31 | 26 | 36 | 30 | 26 | |
| 10 | 47 | 35 | 28 | 23 | 45 | 34 | 28 | 24 | 33 | 27 | 23 | |

Catalog Number:
K24/WS/8-2B

Lamps:
Two F32T8

Ballast:
Electronic 2-F32IS

Ballast Pan Ordering Guide

| | | | | | |
|----------------------|---------------------------|-----------------------|--------------------|-------------------|---------------------------|
| K24 Series | 4 Channel Width | WA Material | 4 Length | 2 Lamps | B Socket Option |
|----------------------|---------------------------|-----------------------|--------------------|-------------------|---------------------------|

Ballast Pan Series

G24 or G25 - One piece ballast pan only

K24 or K25 - Socketed Kit includes shunted sockets, one piece ballast pan and self-tapping screws

PG24 or PG25 - Socketed Kit includes shunted sockets, one piece ballast pan and self-tapping screws, with ballast

Channel Width

4 - 4.25 inch width
5 - 5 inch width
(otherwise specify width)

Material Type

WA - 91% White Aluminum

Luminaire Length

3 - 3 ft. or 36 Inches
4 - 4 ft. or 48 Inches
6 - 6 ft. or 72 Inches
8 - 8 ft. or 96 Inches

Number of Lamp

1 - One Lamp
2 - Two Lamps
3 - Three Lamps
4 - Four Lamps

Socket Pin Option

B - T8-Bi-Pin Socket
C - T5-Bi-Pin Socket

Download catalog PDF's, IES files and cutsheets on our website.



www.usenergysciences.com
1.800.537.1629

US Energy Sciences
reflecting technology™