

EXIT SIGNS

Application

This quality sign is ideal for commercial, institutional and industrial facilities where economy, appearance and ultimate ease of installation and maintenance are desired. Also ideal when a low profile unit needs to meet limited space requirements.


Construction

UV stable, high impact, injection molded, V-O flame resistant thermoplastic housing. Universal mounting is standard for end, ceiling or wall application is standard. Canopy included. Universal pop out chevron directional arrows can be put back in if desired. Compact, low profile design in neutral finish. Available with either red or green letters.

Electrical

Comes with universal transformer for 120 or 277 VAC operation, dual voltage, push to test switch and charge rate/power on LED indicator light. Self diagnostic test circuit. Premium batteries provide 90 minutes emergency light for red or green signs. Exceeds NFPA life Safety Code 70 and 101 illumination requirements.



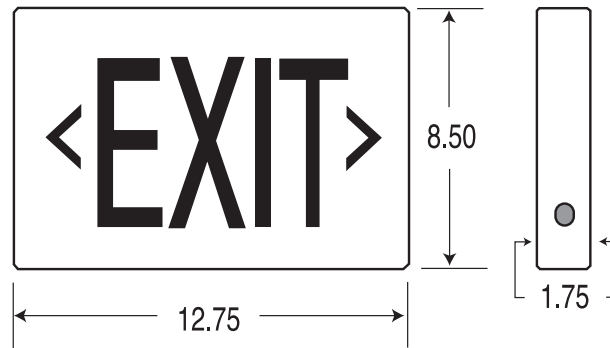

Ordering Guide

CEW Series	XLD Battery	2 Faces	6 Letter Size	P Housing	W Frame Color	W Face color
----------------------	-----------------------	-------------------	-------------------------	---------------------	-------------------------	------------------------

Series
CEW - LED A.C.

Battery Option
XLD - 90 Min. Battery

Number of Faces
1 - 1 Face
2 - 2 Face

Letter Size
6 - 6 Inch Height

Housing Type
P - Plastic
S - White Paint Steel

Frame Color
W - White
B - Black

Face Color
R - Red
G - Green

Options and Accessories
DR Damp Rated
WC Wire Cage

Download catalog PDF's, IES files and cutsheets on our website.



www.usenergysciences.com
1.800.537.1629

US Energy Sciences
reflecting technology™