

VCS SERIES - Vapor Tight T5 or T8

Clear Round Lens

reflect-a-light®

☑ Water-proof ☑ Demanding Environment ☑ Lightweight

Application

- Industrial
- Damp Locations
- Parking Garages
- Freezers

Benefits

- High Corrosion Resistant
- Resists Abuse
- Weather-proof Enclosure
- Low Dirt Depreciation

Features


- Will Not Rust
- 25 Year Reflector Warranty
- Paint-free Finish
- ETL Certified

Photometry

- Pending

Design

- Enclosed fiberglass body, will not melt or burn
- Stainless steel captive latches
- Polycarbonate clear round lens
- Sockets snap-in and twist-lock
- End mounted motion sensors available
- ETL Certified

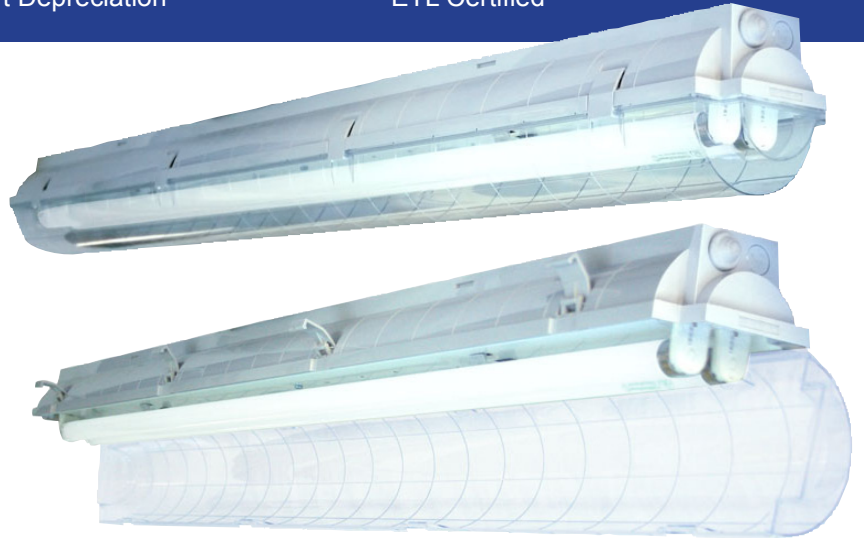

Pictured: VCO 2-Lamp T8 Fixture
Optically Clear Lens 5.37" x 9.00" x 51.75"

Input Wattage/Lumens		
Fixture Configuration	System Wattage	Lumens
2 Lamp 32 Wattage	59	5,280
3 Lamp 32 Wattage	108	10,177
4 Lamp 32 Wattage	146	13,923
2 Lamp 54 Wattage	116	10,000
3 Lamp 54 Wattage	174	15,000
4 Lamp 54 Wattage	232	20,000

*Lamp/ballast information provided from GE based on Proline ballast and F32T8/SPX41/ECO lamps.

Fixture Ordering Guide Example

VCS-023204-WAN

Series	Lamps	Wattage	Length	Material	Power Factor
VCS	01 - 1 Lamp 02 - 2 Lamp	32 - 32W T8	04 - 4' 08 - 8'	EA - 95% Enhanced Aluminum SA - 86% Specular Aluminum WA - 91% White Aluminum	H - High N - Normal L - Low 4 - 480 Volt

Option Ordering Guide

See Standard Option Guide



Industry Leader in
Customization + Lead Times
for Over 25 Years



VIDALIA, GA
1-800-537-1629

reflecting technology™
www.USEnergySciences.com
www.us-es.co